


- ⌋ Embedded GSM 2G/3G/4G modem*
- ⌋ Dual-SIM technology (passive) – access to 2 independent GSM networks ensures superior availability
- ⌋ 16 binary inputs (galvanic isolation)
- ⌋ 12 binary outputs, selectively configurable as inputs (galvanic isolation)
- ⌋ 4 analog inputs 4–20 mA (galvanic isolation)
- ⌋ 2 analog inputs 0–10 V (w/o galvanic isolation)
- ⌋ Ethernet port 10Base-T/100Base-TX
- ⌋ RS-232/485 serial port for external devices (galvanic isolation)
- ⌋ RS-232 port with 5 V feeding for operator panels
- ⌋ OLED graphic display (128x64 pixels)
- ⌋ Diagnostic LEDs
- ⌋ Battery buffered power supply (SLA battery support)
- ⌋ Data logger with 0,1 sec resolution (SD card support)
- ⌋ Programmable logic controller (PLC)
- ⌋ FlexSerial – programmable handling of non-standard serial protocols

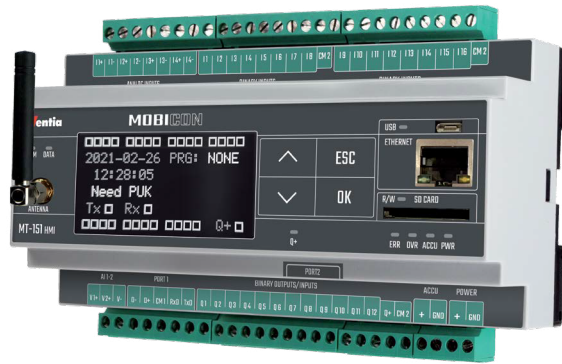

- ⌋ Standard communication protocols (MODBUS RTU, MODBUS TCP, M-BUS, IEC 60870-5-104**, GENIbus**)
- ⌋ Remote configuration, programming, diagnostics and firmware upgrade over network
- ⌋ 3-years warranty

MT-151 HMI v3 LTE is a family of new generation telemetry controllers for demanding tasks and applications. MT-151 HMI v3 LTE model is a professional, industrial design combining functionality of programmable logic controller, data logger, protocol converter and wireless communication interface packet transmission over 2G/3G/4G networks or/and Ethernet interface. Dual-SIM technology ensures superior level of 2G/3G/4G networks availability, providing redundant channel of data transmission. Ethernet port provides powerful capabilities of integration with other devices and systems of the user. Graphic display is a convenient user interface for local diagnostics, supervision and monitoring – without use of external operator panel or portable PC. With compact, robust design, integral GSM modem, attractive technical features and easy to use configuration tools the MT-151 HMI v3 LTE controller is an optimal solution for demanding wireless telemetry, control, diagnostic, surveillance and alarm systems.

Resources:

- ⌋ 16 optoisolated binary/counter inputs 12/24 V DC (I1 – I16), positive logic
- ⌋ 12 optoisolated binary outputs 12/24 V DC (Q1 – Q12), positive logic – selectively configurable as inputs
- ⌋ 4 optoisolated differential analog inputs 4–20 mA (accuracy 0,2%, 15-bit resolution @ 1 sec interval) with configurable hysteresis and filtration
- ⌋ 2 single-ended analog inputs 0-10 V
- ⌋ Ethernet port 10Base-T/100Base-TX
- ⌋ Isolated RS-232/485 serial port
- ⌋ RS-232 serial port with 5 V / 500 mA feeding
- ⌋ micro USB (AB) port for local configuration and programming
- ⌋ Interface for backup 12 V SLA battery – charging support

* depending on the mounted modem
** option

- ⌋ 2 SIM holders – Dual-SIM support (2G/3G/4G* network redundancy)
- ⌋ OLED graphic display (128x64) and status LEDs
- ⌋ Embedded temperature sensor
- ⌋ Internal flags and registers for user application program
- ⌋ Firmware Flash memory with remote update capability
- ⌋ Data and Event logger supporting SD card
- ⌋ RTC with external synchronization functions

Functionality:

- ⌋ Transmission modes
 - » 2G/3G/4G* – packet transmission, depending on the mounted modem
 - » SMS
 - » e-mail (without SSL)
- ⌋ Access to module resources using standard protocols MODBUS RTU and MODBUS TCP
- ⌋ Intelligent packet routing and Multimaster support in MODBUS mode
- ⌋ Binary inputs configurable as counting inputs (upto 2 kHz) – I1-I4
- ⌋ Programmable control logic using I/Os, timers, counters, flags and registers for triggering events (data transmission/recording, SMS transmission, e-mail transmission, setting outputs and internal registers, etc.)
- ⌋ Event based transmission (unsolicited messaging) triggered by change of binary input state, internal flag state, by reaching alarm level of analog input, by true condition
- ⌋ Configurable SMS messages triggered by alarms and scheduled
- ⌋ Dynamic fields in SMS text
- ⌋ Configurable alarm levels, hysteresis, deadband and filtration for analog inputs



16-28DI
/12DO
6AI



RS-232

DIN RAIL

RS-232


RS-232/485

4G



- ⌄ Data and event recording on SD card with 0,1 sec resolution
- ⌄ Transmission of data from external devices connected to RS-232/485 serial port
- ⌄ 5 V feeding provided for external device connected to RS-232 serial port (eg. operator panel, GPS receiver)
- ⌄ Configurable events based on mirrored resources of external devices
- ⌄ Remote configuration and programming over network
- ⌄ Configurable access security – list of authorized IPs and tel. numbers, optional password
- ⌄ DIN rail mounting
- ⌄ Supply voltage 12/24 VDC (24 VDC in case of using connected external battery)
- ⌄ Built-in management of external SLA backup battery
- ⌄ Built-in advanced auto-diagnostics
- ⌄ Detachable terminal blocks

Drawings and dimensions (all dimensions in millimeters)

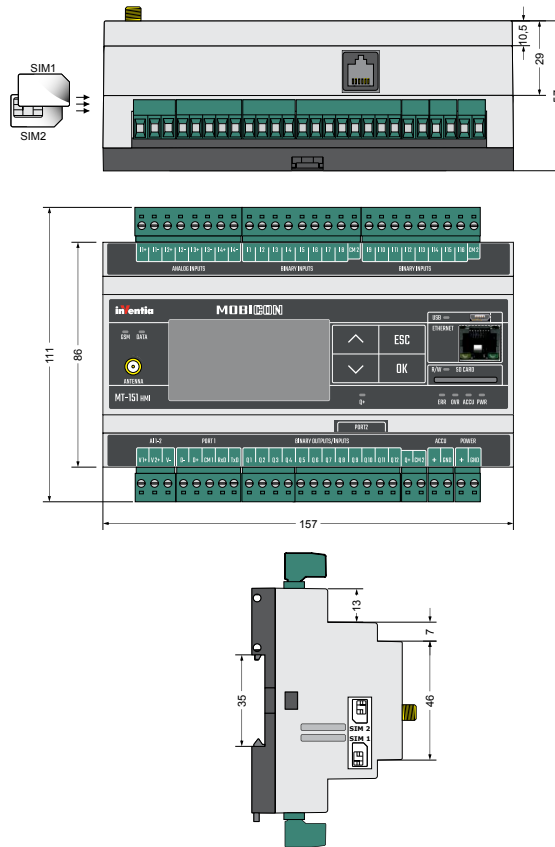

General

Dimensions (L x W x H)	157 x 86 x 58 mm
Weight	382 g
Fixing	DIN Rail 35 mm
Operating temperature	-20 do +65 °C
Operating humidity	up to 95%, noncondensing
Protection class	IP 40

Modem **, **

Modem type	Thales ELS61-E	Thales ELS62-W	SIMCom A7672E
Region	Europe, Asia	Europe, Latin America, India	Europe, Asia
2G	900, 1800 MHz	850, 900, 1800, 1900 MHz	900, 1800 MHz
3G	Band 8, 1 (900, 2100 MHz)	---	---
4G (LTE Cat 1)	Band 1, 3, 8, 20, 28	FDD-LTE Rel.13: Band 1, 2, 3, 4, 5, 7, 8, 20, 28, 66 TDD-LTE Rel.13: Band 38, 40, 41	Band 1, 3, 5, 7, 8, 20
Antenna socket	50Ω, SMA-F	50Ω, SMA-F	50Ω, SMA-F

* depending on the mounted modem **modem versions are available to serve other regions of the world

Inputs Q1–Q12 *

Maximum input voltage	30 V
Input current	2,4 mA
Input voltage ON (1)	>9,4 V
Input voltage OFF (0)	<8,4 V

* according to IEC 61131-2 for switch type 1 and 3

Inputs I1–I16 *

Input voltage range	0–30 V
Input current	2,4 mA
Input voltage ON (1)	>9,4 V
Input voltage OFF (0)	<8,4 V

* according to IEC 61131-2 for switch type 1 and 3

Outputs Q1–Q12

Maximum output current	100 mA
Voltage drop @ 100 mA	<0,5 V
OFF state current	<100 μA

Power supply

DC (nom. 12/24 V)	10,8–30 V		
Input current (@ 24 VDC)	Idle 0,06 A	Active 0,25 A	Max. 1,00 A

Analog inputs 0–10 V (2)

Input voltage range	0–10 V
Maximum input voltage	20 V
Input impedance	197 k Ω typ.
A/D converter resolution	16 bitów
Accuracy (@ 25 °C)	0,5 %

Analog inputs 4–20 mA (4)

Input current range	4–20 mA
Maximum input current	50 mA
Dynamic input impedance	55 Ω typ.
Voltage drop @ 20 mA	<5 V
A/D converter resolution	15 bitów
Accuracy (@ 25 °C)	0,2 %